


SERIES 2200

SLIDING DOOR

The series 2200 high-performance sliding door system offers superior operation and thermal efficiency, making it an excellent choice for upscale residential and renovation applications.




European saddle-rail sash design houses the three-point lock and overlaps the frame for a tight seal



Interlocking sash with heavy steel reinforcing created a structural rigidity that suits any residential placement as well as many commercial applications



1" Dual or True 1 3/8" Triple Glazing for optimal thermal performance



Thicker glass for a stronger appearance and offset thickness for impressive sound reduction



Low-profile aluminum capped sloped sill



Ball bearing Delrin nylon for strong and smooth operation

3-point locking system

- 48" tall stainless steel lock
- Three individually adjustable locking points
- Opposing upper and lower lock points prevents the door from being lifted
- Meet the AAMA Forced Entry Requirements The Nexus Three Point Multi-Point System exceeds 3,000 lbs of pulling force.



secondary lock

We worked with our german engineers on an integrated secondary lock with two locking positions.

1st position - closed

2nd position - open 3" for ventilation




Hardware Finishes

Choose from a variety of attractive finishes (keyed lock optional)



3 configurations

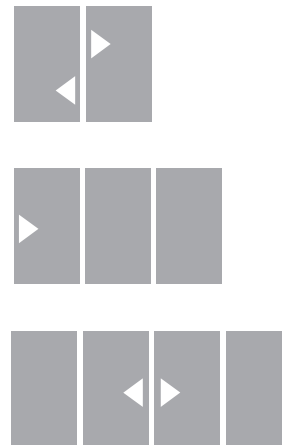

more info at
evw.ca

